Home → Spec Search → All Types → Mini Excavator → Kubota → KX71-3

KUBOTA KX71-3 MINI EXCAVATOR


VIEW ARTICLES ON THIS ITEM

Select language

Print specification

Looking to purchase this item?

Need to sell equipment?

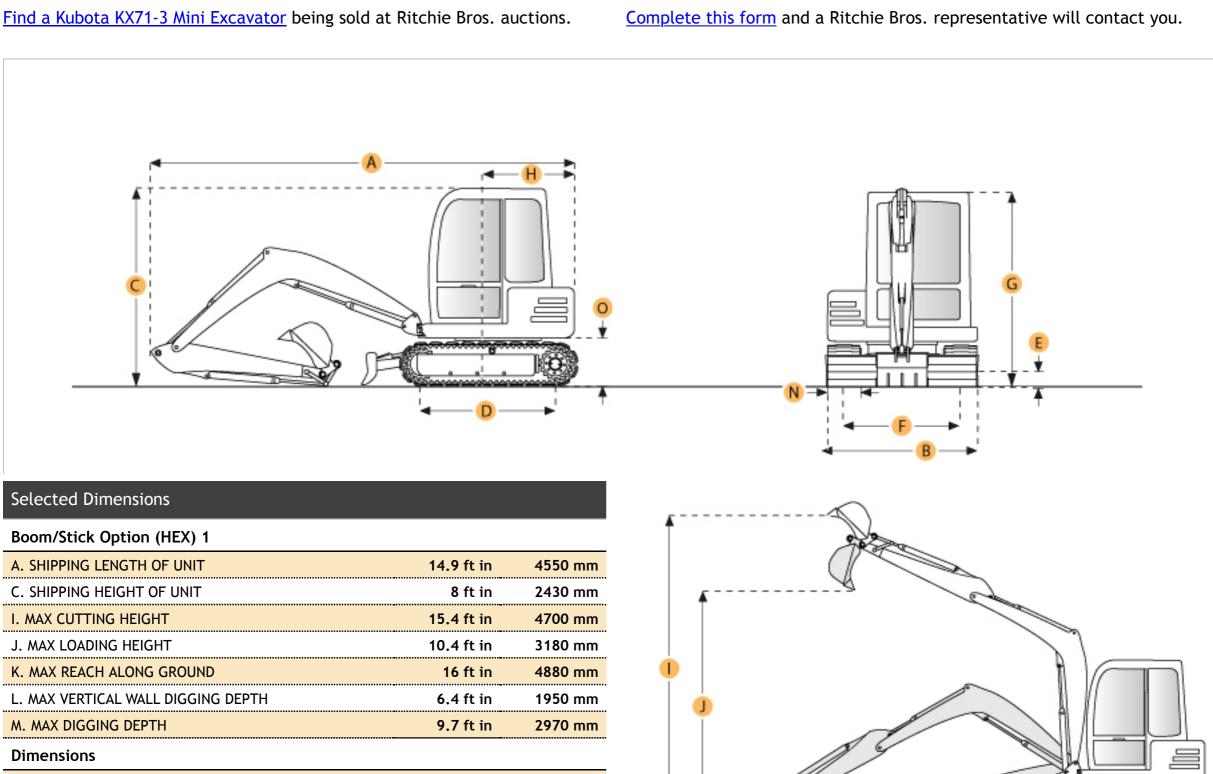

20.5 kw

1.5 L

Dimensions		
B. WIDTH TO OUTSIDE OF TRACKS	4.9 ft in	1500 mm
D. LENGTH OF TRACK ON GROUND	ft in	mm
E. GROUND CLEARANCE	1 ft in	305 mm
G. HEIGHT TO TOP OF CAB	ft in	mm
H. TAIL SWING RADIUS	4 ft in	1210 mm

Specification	
Engine	
MAKE	Kubota
MODEL	V1505

NUMBER OF CYLINDERS 4
ASPIRATION liquid-cooled, overhead valve diesel engine

27.5 hp

91.4 cu in

Operational

GROSS POWER

DISPLACEMENT

•		
OPERATING WEIGHT	6305 lb	2859.9 kg
FUEL CAPACITY	11.9 gal	45 L
COOLING SYSTEM FLUID CAPACITY	1.4 gal	5.3 L
HYDRAUILC SYSTEM FLUID CAPACITY	13.2 gal	50 L
ENGINE OIL CAPACITY	1.2 gal	4.5 L
HYDRAULIC PUMP FLOW CAPACITY	17 gal/min	64.4 L/min

Swing Mechanism

SWING SPEED	
l la davas veis es	

Undercarriage


GROUND PRESSURE

MAX TRAVEL SPEED

3.9 psi
26.9 kPa
4.5 km/h

9.4 rpm

Boom/Stick Option (HEX) 1

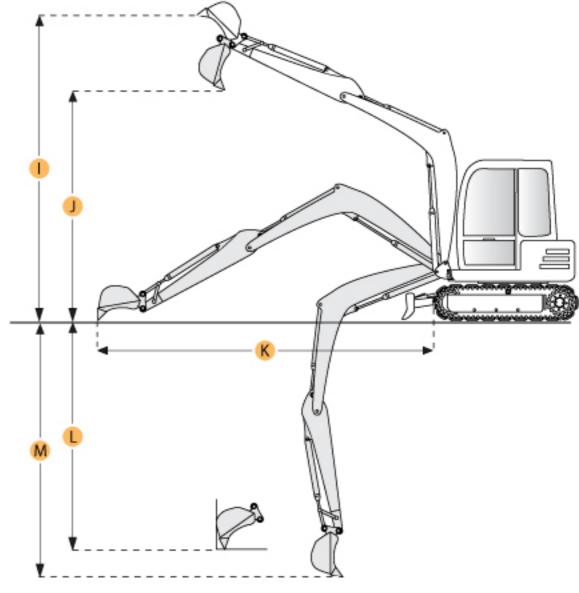

SHIPPING HEIGHT OF UNIT	8 ft in	2430 mm
SHIPPING LENGTH OF UNIT	14.9 ft in	4550 mm
MAX DIGGING DEPTH	9.7 ft in	2970 mm
MAX REACH ALONG GROUND	16 ft in	4880 mm
MAX CUTTING HEIGHT	15.4 ft in	4700 mm
MAX LOADING HEIGHT	10.4 ft in	3180 mm
MAX VERTICAL WALL DIGGING DEPTH	6.4 ft in	1950 mm
Dimensions		
WIDTH TO OUTSIDE OF TRACKS	4.9 ft in	1500 mm
HEIGHT TO TOP OF CAB	ft in	mm
GROUND CLEARANCE	1 ft in	305 mm
TAIL SWING RADIUS	4 ft in	1210 mm
LENGTH OF TRACK ON GROUND	ft in	mm

© 2007-2017 RitchieSpecs Equipment Specifications Ritchie Bros. Auctioneers © | <u>Terms of Use</u> | <u>Privacy Statement</u> OEM specifications are provided for base units. Actual equipment might vary with options.